



HTC Flyer Back Cover Replacement

This guide shows you how to remove and replace the back cover of your device.

Written By: Justin Funk



INTRODUCTION

Prerequisite Only



TOOLS:

- [T5 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-


Step 1 — Removing the top panel



- Apply pressure along the bottom of the white panel containing the camera and push upwards.

i It may take some effort, but it will smoothly slide off.


Step 2 — Removing the back panel

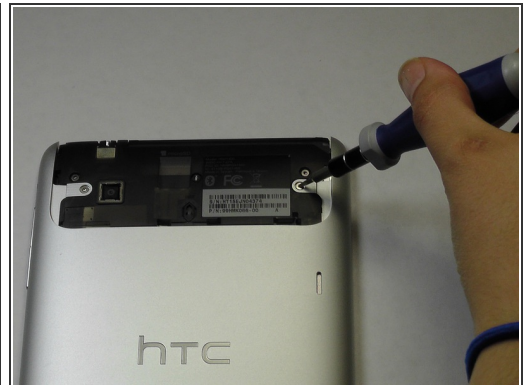

- Unscrew the four of 3.5mm Torx T5 screws that run along the sides of the exposed innards.


i All screws in the device will use the Torx T5 screwdriver, so keep it handy.

Step 3 — Removing the inner protective panel

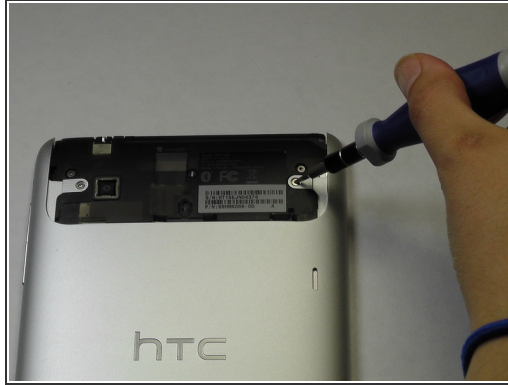

- Remove the black protective piece of plastic by sliding it upwards
 - Remove the two 3.5mm Torx screws holding the protective plastic down on along the sides.
- ⚠ A center 3.5mm Torx screw will be covered by "VOID" sticker. Be warned; removing this will void the device's warranty.
- Either remove the sticker or jam the screwdriver into the screw, and remove the screw.
 - Remove the protective panel by sliding it upwards.

Step 4 — Removing the back plate

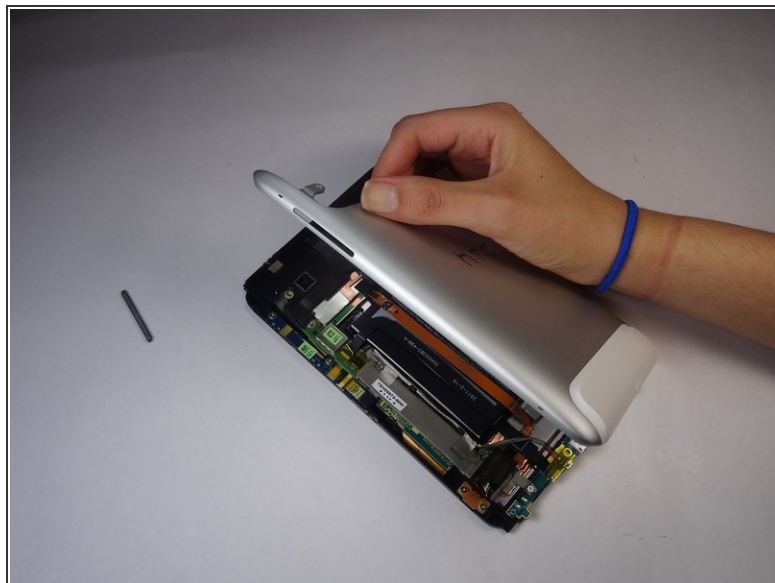

- Before removing the back cover, apply some scotch tape to the volume buttons to prevent them from falling out of the back panel
- Use a plastic removal device to lever up the top half of the cover.
- Lift the back panel up

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-19 08:56:58 PM.